

# YASKAWA

# SOLECTRIA XGI™ 1500


## Premium 3-Ph Transformerless Utility-Scale Inverters

### Features

- Made in the USA with global components
- Buy American Act (BAA) compliant
- Four models: 125kW/125kVA, 125kW/150kVA, 150kW/166kVA, 166kW/166kVA
- 99.0% peak efficiency
- Flexible solution for distributed and centralized system architecture
- Advanced grid-support functionality Rule 21/UL1741SA
- Robust, dependable and built to last
- Lowest O&M and installation costs
- Access all inverters on site via WiFi from one location
- Remote diagnostics and firmware upgrades

### Options

- String combiners for distributed and centralized systems
- Web-based monitoring
- Extended warranty

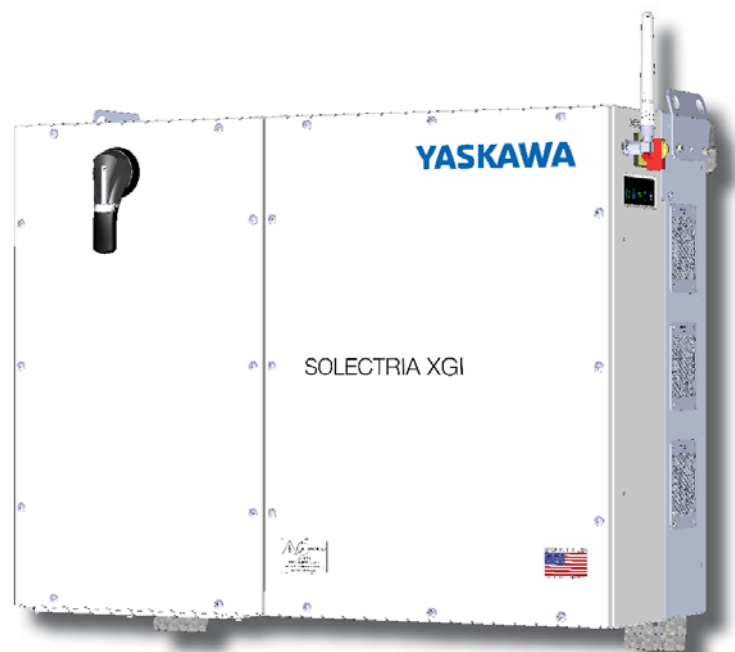

Yaskawa Solectria Solar's XGI 1500 utility-scale string inverters are designed for high reliability and built of the highest quality components that were selected, tested and proven to last beyond their warranty. The XGI 1500 inverters provide advanced grid-support functionality and meet the latest IEEE 1547 and UL 1741 standards for safety. The XGI 1500 inverters are the most powerful 1500VDC string inverters in the PV market and have been engineered for both distributed and centralized system architecture. Designed and engineered in Lawrence, MA, the new SOLECTRIA XGI inverters are assembled and tested at Yaskawa America's facilities in Buffalo Grove, IL. The XGI 1500 inverters are Made in the USA with global components and are compliant with the Buy American Act.

MADE IN THE USA



With U.S. and Global Components

## SOLECTRIA SOLAR

# SOLECTRIA XGI 1500

## Specifications

	XGI 1500-125/125	XGI 1500-125/150	XGI 1500-150/166	XGI 1500-166/166
<b>DC Input</b>				
Absolute Maximum Input Voltage	1500 VDC	1500 VDC	1500 VDC	1500 VDC
Maximum Power Input Voltage Range (MPPT)	860-1250 VDC	860-1250 VDC	860-1250 VDC	860-1250 VDC
Operating Voltage Range (MPPT)	860-1450 VDC	860-1450 VDC	860-1450 VDC	860-1450 VDC
Number of MPP Trackers	1 MPPT	1 MPPT	1 MPPT	1 MPPT
Maximum Operating Input Current	148.3 A	148.3 A	178.0 A	197.7 A
Maximum Operating PV Power	128 kW	128 kW	153 kW	170 kW
Maximum DC/AC Ratio   Max Rated PV Power	2.0   250 kW	2.0   250 kW	1.66   250 kW	1.5   250 kW
Max Rated PV Short-Circuit Current ( $\sum I_{sc} \times 1.25$ )	320 A	320 A	320 A	320 A
<b>AC Output</b>				
Nominal Output Voltage	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph
AC Voltage Range	-12% to +10%	-12% to +10%	-12% to +10%	-12% to +10%
Continuous Real Output Power	125 kW	125 kW	150 kW	166 kW
Continuous Apparent Output Power	125 kVA	150 kVA	166 kVA	166 kVA
Maximum Output Current	120 A	144 A	160 A	160 A
Nominal Output Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Power Factor (Unity default)	+/- 0.85 Adjustable	+/- 0.85 Adjustable	+/- 0.85 Adjustable	+/- 0.85 Adjustable
Total Harmonic Distortion (THD) @ Rated Load	<3%	<3%	<3%	<3%
Grid Connection Type	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND
Fault Current Contribution (1 cycle RMS)	144 A	173 A	192 A	192 A
<b>Efficiency</b>				
Peak Efficiency	98.9%	98.9%	99.0%	99.0%
CEC Average Efficiency	98.5%	98.5%	98.5%	98.5%
Tare Loss	<1 W	<1 W	<1 W	<1 W
<b>Temperature</b>				
Ambient Temperature Range	-40°F to 140°F (-40C to 60C)		-40°F to 140°F (-40C to 60C)	
De-Rating Temperature	122°F (50C)		113°F (45C)	
Storage Temperature Range	-40°F to 167°F (-40C to 75C)		-40°F to 167°F (-40C to 75C)	
Relative Humidity (non-condensing)	0 - 95%		0 - 95%	
Operating Altitude	9,840 ft (3 km)		9,840 ft (3 km)	
<b>Communications</b>				
Advanced Graphical User Interface			WiFi	
Communication Interface			Ethernet	
Third-Party Monitoring Protocol			SunSpec Modbus TCP/IP	
Web-Based Monitoring			Optional	
Firmware Updates			Remote and Local	
<b>Testing &amp; Certifications</b>				
Safety Listings & Certifications			UL 1741, IEEE 1547, UL 1998	
Advanced Grid Support Functionality			Rule 21, UL 1741SA	
Testing Agency			ETL	
FCC Compliance			FCC Part 15, Class A	
<b>Warranty</b>				
Standard and Options			5 Years Standard; Option for 10 Years	
<b>Enclosure</b>				
Acoustic Noise Rating			56 dBA @ 3 m	
DC Disconnect			Integrated 2-Pole 250 A DC Disconnect	
Mounting Angle			Vertical only	
Dimensions			Height: 29.5 in. (750 mm)   Width: 39.4 in. (1000 mm)   Depth: 15.1 in. (380 mm)	
Weight			245 lbs (111 kg)	
Enclosure Rating and Finish			Type 4X, Polyester Powder-Coated Aluminum	

Specifications subject to change.

## SOLECTRIA SOLAR

**Yaskawa Solectria Solar**  
360 Merrimack Street  
Lawrence, MA 01843  
[solectria.com](http://solectria.com)

1-978-683-9700  
[inverters@solectria.com](mailto:inverters@solectria.com)

DOCR-070730-P | Aug 2019  
© 2019 Yaskawa Solectria Solar

# YASKAWA