

YASKAWA

SOLECTRIA XGI 1500


Premium 3-Ph Transformerless Utility-Scale Inverters

Features

- Made in the USA with global components
- Buy American Act (BAA) compliant
- Four models: 125kW/125kVA, 125kW/150kVA, 150kW/166kVA, 166kW/166kVA
- Flexible solution for distributed and centralized system architecture
- Advanced grid-support functionality Rule 21/UL1741SA (pending)
- Robust, dependable and built to last
- Lowest O&M and installation costs
- Access all inverters on site via WiFi from one location
- Remote diagnostics and firmware upgrades

Options

- Attachable string combiner for distributed architecture
- Plug & play MC4 or H4 connectors for the attachable string combiner
- Web-based monitoring
- Extended warranty

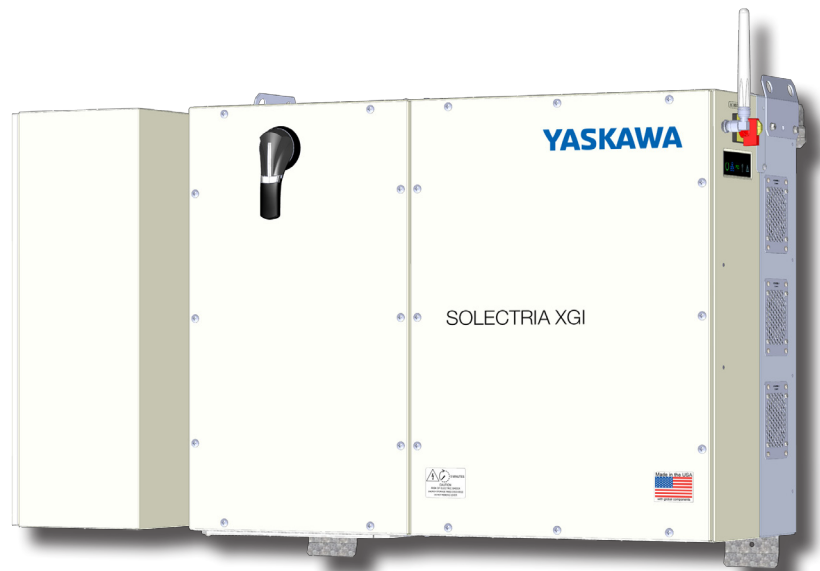

Yaskawa Solectria Solar's XGI 1500 utility-scale string inverters are designed for high reliability and built of the highest quality components that are tested and proven to last beyond their warranty. The XGI 1500 inverters provide advanced grid-support functionality and meet the latest IEEE 1547 and UL 1741 standards for safety. The virtual HMI allows users to connect wirelessly to the inverters using a smart phone or tablet, to accelerate commissioning. The XGI 1500 inverters are the most powerful 1500VDC string inverters in the PV market, and engineered for both distributed and centralized system architecture. Designed and engineered in Lawrence, MA, the XGI inverters are assembled and tested at Yaskawa America's facilities in Buffalo Grove, IL. The all new XGI 1500 inverters are Made in the USA with global components, and are compliant with the Buy American Act.

MADE IN THE USA



With U.S. and Global Components

SOLECTRIA SOLAR

SOLECTRIA XGI 1500

Specifications

	XGI 1500-125/125	XGI 1500-125/150	XGI 1500-150/166	XGI 1500-166/166
DC Input				
Absolute Maximum Input Voltage	1500 VDC	1500 VDC	1500 VDC	1500 VDC
Maximum Power Input Voltage Range (MPPT)	860-1250 VDC	860-1250 VDC	860-1250 VDC	860-1250 VDC
Operating Voltage Range (MPPT)	860-1450 VDC	860-1450 VDC	860-1450 VDC	860-1450 VDC
Number of MPP Trackers	1 MPPT	1 MPPT	1 MPPT	1 MPPT
Maximum Operating Input Current	147.6 A	147.6 A	177.1 A	196.0 A
Maximum Operating PV Power	127 kW	127 kW	152 kW	169 kW
Maximum DC/AC Ratio	1.5	1.5	1.5	1.5
Maximum Rated PV Input (at 1.5 DC/AC Ratio)	188 kWdc	188 kWdc	225 kW	250 kW
Attachable String Combiner (Optional, engineered for use with XGI 1500 inverters)				
Maximum Number of DC Inputs	18		24	
Fuse Rating Options	15 A, 20 A, 25 A, 30 A		15 A, 20 A, 25 A, 30 A	
Fuse Configuration Options	Both polarities fused (NEC 2014), Positive polarity fused (NEC 2017)			
PV Connector Options	Amphenol H4, Multi-Contact MC4			
DC Disconnect	Isolated by use of integrated 2-Pole DC Disconnect on the XGI 1500 inverter			
Dimensions and Weight	Height: 29.5 in. (749 mm) Width: 15.1 in. (385 mm) Depth: 12 in. (305 mm) Weight: 30 lbs (13.6 kg)			
AC Output				
Nominal Output Voltage	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph	600 VAC, 3-Ph
AC Voltage Range	-12% to +10%	-12% to +10%	-12% to +10%	-12% to +10%
Continuous Real Output Power	125 kW	125 kW	150 kW	166 kW
Continuous Apparent Output Power	125 kVA	150 kVA	166 kVA	166 kVA
Maximum Output Current	120 A	144 A	160 A	160 A
Nominal Output Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Power Factor (Unity default)	+/- 0.85 Adjustable	+/- 0.85 Adjustable	+/- 0.85 Adjustable	+/- 0.85 Adjustable
Total Harmonic Distortion (THD) @ Rated Load	<3%	<3%	<3%	<3%
Grid Connection Type	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND	3-Ph + N/GND
Fault Current Contribution (1 cycle RMS)	144 A	173 A	192 A	192 A
Efficiency				
Peak Efficiency	98.8%	98.8%	98.8%	98.7%
CEC (pending) Average Efficiency	98.5%	98.5%	98.5%	98.5%
Tare Loss	<1 W	<1 W	<1 W	<1 W
Temperature				
Ambient Temperature Range	-40°F to 140°F (-40C to 60C)		-40°F to 140°F (-40C to 60C)	
De-Rating Temperature	122°F (50C)		113°F (45C)	
Storage Temperature Range	-40°F to 167°F (-40C to 75C)		-40°F to 167°F (-40C to 75C)	
Relative Humidity (non-condensing)	0 - 95%		0 - 95%	
Operating Altitude	9,840 ft (3 km)		9,840 ft (3 km)	
Communications				
Advanced Graphical User Interface	WiFi			
Communication Interface	RJ-45 Ethernet			
Third-Party Monitoring Protocol	SunSpec Modbus TCP/IP			
Web-Based Monitoring	Optional			
Firmware Updates	Remote and Local			
Testing & Certifications (pending)				
Safety Listings & Certifications	UL 1741, IEEE 1547, UL 1998			
Advanced Grid Support Functionality	Rule 21, UL 1741SA (pending)			
Testing Agency	ETL			
FCC Compliance	FCC Part 15, Class A			
Warranty				
Standard and Options	5 Years Standard; Options for 10, 15 and 20 Years			
Enclosure				
Acoustic Noise Rating	55 dBA @ 1 m			
DC Disconnect	Integrated 2-Pole 250 A DC Disconnect			
Mounting Angle	Vertical only			
Dimensions	Height: 29.5 in. (750 mm) Width: 38.4 in. (975 mm) Depth: 15.1 in. (384 mm)			
Weight	230 lbs (104 kg)			
Enclosure Rating and Finish	Type 4X, Polyester Powder-Coated Aluminum			

Specifications subject to change.

SOLECTRIA SOLAR

Yaskawa Solectria Solar
360 Merrimack Street
Lawrence, MA 01843
solectria.com

1-978-683-9700
Email: inverters@solectria.com

DOCR-070730-F | March 2018
© 2018 Yaskawa Solectria Solar

YASKAWA